

uPVC In-House Water Piping System



EMERALD


uPVC Pipes and Fittings

One name, One standard of Excellence.

HIGHER IMPACT STRENGTH • THICKER WALLS

PIPES

NOMINAL SIZE		O.D. mm	WALL THICKNESS		L LENGTH mm
mm	inch		min.	max.	
20	1/2	20	1.8	2.18	3000
25	3/4	25	1.9	2.29	3000
32	1	32	2.0	2.4	3000
40	1 1/4	40	2.3	2.73	3000
50	1 1/2	50	2.9	3.39	3000
63	2	63	3.6	4.16	3000

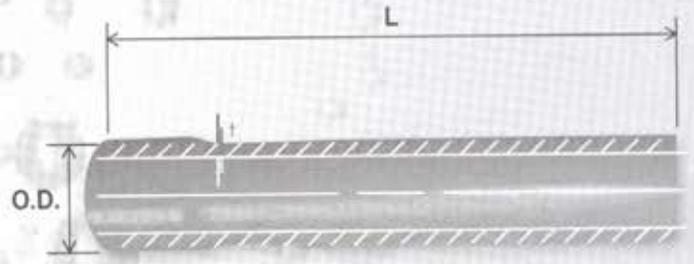

FITTINGS

THICKER WALLS • LONGER LAYING LENGTHS • DEEPER SOCKETS • ULTRA HIGH IMPACT



COUPLING



END CAP



MALE ADAPTER



FEMALE ADAPTER



COUPLING RED



WATER ELBOW



WATER TEE



THREADED ELBOW



THREADED TEE

SEE THE DIFFERENCE OF EMERALD IN-HOUSE FITTINGS

WATER ELBOW 20 MM

PARAMETER	EMERALD	BRAND X
Wall Thickness (t)	4.40	3.0
Socket Depth (h)	18.70	16.5
Laying Length (z)	11.70	10.6

WATER TEE 25 MM

PARAMETER	EMERALD	BRAND X
Wall Thickness (t)	4.20	4.0
Socket Depth (h)	20.10	19.0
Laying Length (z)	13.60	13.40

